

GNT 165

STANDARD SPECIFICATIONS

Engine

- INTER Heavy duty diesel engine
- Revolution: 1500 rpm
- Water cooled
- Tropical type radiator

Alternator

- VDE 0530 & IEC 34-I standardizations
- Synchron type brushless
- Automatic voltage regulation (AVR)
- Overload acceptance: 110% for 1 hour, 150% for 2 minutes
- Short circuit resistance: 300 for 10 seconds
- Insulation class: H
- Insulation resistance: 1800 V AC
- Voltage: 231/400 AC three phase
- Voltage regulation: $\pm 0.5\%$
- Protection class: IP23
- Frequency: 50 Hz

Manuel Control Panel

- Microprocessed Electronic Control Panel
- Relays
- Protection fuses
- Thermic magnetic circuit breaker (TMS) 3-pole
- Emergency stop button

Automatic Control Panel

- Microprocessed AMF Electronic Control Panel
- Protection fuses
- Battery charger
- Power Transfer (For ATS)
- Emergency stop button

Chassis


- Mounted on the steel base chassis
- Elastic vibration dampers between engine and chassis
- Chassis integrated fuel tank
- Dial type mechanical fuel indicator

Canopy

- Easy lifting and moving
- Metal parts are coated with electrostatic polyester coated, powder painted
- Thermally insulated exhaust system
- Acoustic insulation with rot*proof, moisture-repellent and non-flammable material (per DIN 4102 A2)

Optional Properties (based on the requirement)

- Thermic magnetic circuit breaker for automatic models
- Protection canopy
- Sound proof canopy
- Trailer mounted genset
- Automation with PLC
- Automatic fuel filling system for external fuel tank (integrated with internal fuel tank)
- Panels for synchronising and parallel running
- Electronic fuel level indicator with low fuel alarm
- Power distribution panel
- Computer controlled, remote control and monitoring system
- Electronic governor for engines with mechanical governor
- Digital or analog indicators

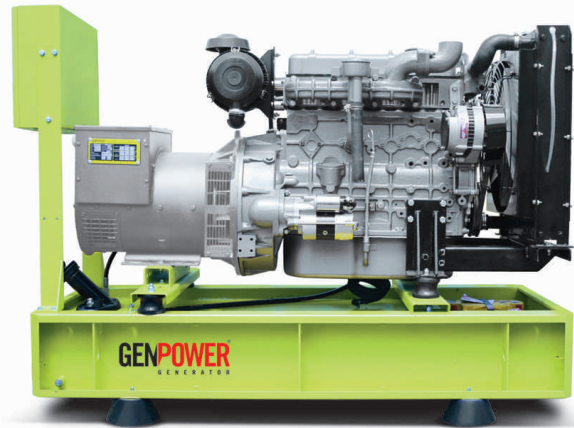

GROUP

Stand-by Power	kVA (kW)	165 (132)
Prime Power	kVA (kW)	150 (120)
Power Factor	cos Q	0.8
Frequency	Hz	50

ENGINE

Make		INTER
Model		IDE 680TG
Rpm	rpm	1500
Prime Power	kW (HP)	129 (173)
Stand-by Power	kW (HP)	143 (192)
Number of Cylinder		6
Cylinder Combination		In-Line
Air Inducation System		T. Charged
Cooling System		Water Cooled
Governor Type		Mechanical
Cylinder Displacement	lt	8
Cylinder Bore / Stroke	mm	112/135
Compression Ratio		17,5 : 1
Electric System		24 VDC
Fuel Consumption %50 Loaded	lt/h	15,3
Fuel Consumption %75 Loaded	lt/h	20,7
Fuel Consumption %100 Loaded	lt/h	27
Fuel Tank Capacity (w/canopy)	lt	168
(w/o canopy)	lt	264

ALTERNATOR

Type		Synchron, Brushless
Overloaded		For 1 hour %110 in 12 hours, for 2 minutes % 150
Insulation Resistance	2U+1000V	Minimum 1800 Volt
Short Circuit Current		For 10 seconds % 300
Isolation Class		H
Voltage		231 / 400 V
Tolerance Of Voltage		$\pm \%0,5$

DIMENSIONS

Width w/o Canopy (w/canopy)	mm	900 (1150)
Lenght w/o Canopy (w/canopy)	mm	2400 (3600)
Height w/o Canopy (w/canopy)	mm	1400 (1800)
Weight w/o Canopy (w/canopy)	kg	1823 (2208)

TECHNICAL SPECIFICATIONS



ISO 9001:2008
OHSAS 18001:2007
ISO 14001:2004



www.genpower.com.tr

GENPOWER, reserves the right to modify the characteristics of it's product at any time in order to incorporate the latest technological developments. The information contained in this document may therefore be changed without notice. For more technical data and information, please contact to GENPOWER.